



**ALLIED MACHINE  
& ENGINEERING**

**WOHLHAUPTER®**

Holemaking Solutions for Today's Manufacturing



Drilling



Reaming



Burnishing



Threading



Specials



**Wohlhaupter®**

▶ *BORING*

Intermediate Modules

**WOHLHAUPTER®**



SECTION

---

# B10-E

---

Intermediate Modules

# Wohlhaupter® Intermediate Modules

NOVITECH® | Reducers | Extensions



## Increase Tool Stability with Intermediate Modules

- Allow for expanded use of existing components.
- Add flexibility to setups.
- Reduce need for specials and their associated cost and lead time.
- Each component individually balanced.

Your safety and the safety of others is very important. This catalogue contains important safety messages. Always read and follow all safety precautions.



This triangle is a safety hazard symbol. It alerts you to potential safety hazards that can cause tool failure and serious injury.

When you see this symbol in the catalogue, look for a related safety message that may be near this triangle or referred to in the nearby text.

There are safety signal words also used in the catalogue. Safety messages follow these words.

### **WARNING**

**WARNING** (shown above) means that failure to follow the precautions in this message could result in tool failure and serious injury.

**NOTICE** means that failure to follow the precautions in this message could result in damage to the tool or machine but not result in personal injury.

**NOTE** and **IMPORTANT** are also used. These are important that you read and follow but are not safety-related.

Visit [www.alliedmachine.com](http://www.alliedmachine.com) for the most up-to-date information and procedures.

## Applicable Industries



Aerospace



Agriculture



Automotive



Firearms



General  
Machining



Oil & Gas




Renewable  
Energy

# Intermediate Modules Table of Contents


## Reference Icons

The following icons will appear throughout the catalogue to help you navigate between products.




### Shanks

A variety of shanks for different machines




### 248 Shanks

A variety of shanks for different machines




### 248 Boring Head

248 boring head that connects into the adapter shanks



### MVS Connection Color Guide

Detailed instructions and information regarding the MVS connection(s)



### Recommended Cutting Data

Speed and feed recommendations for optimum and safe boring



### Through Coolant Option

Indicates that the product is through coolant

## Introduction

Product Overview . . . . . 2 - 3

**NOVI<sup>TECH</sup>® Vibration Damping Modules** . . . . . 4 - 5

**248 Adapters** . . . . . 6 - 7

**Reducers** . . . . . 8 - 11


**Extensions** . . . . . 12 - 13

# Intermediate Modules Product Overview



## Intermediate MODULES


### Reducers

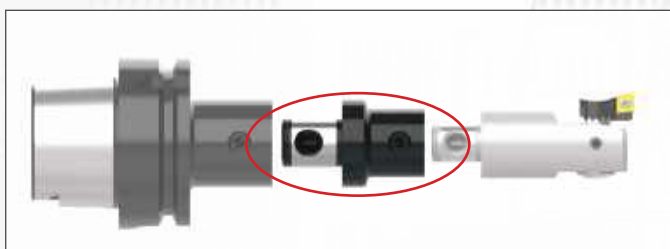

#### Features:

- ▶ Improves rigidity by stepping down to smaller MVS connection sizes.
- ▶ Connects quickly and easily with the MVS connection.
- ▶ Accommodates smaller diameter applications.

### Extensions

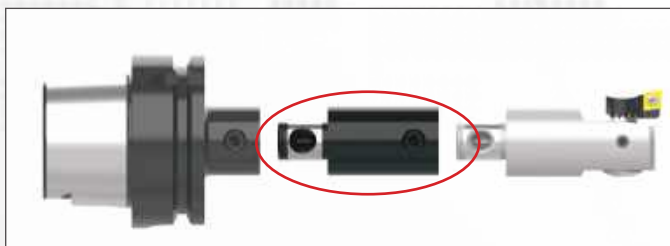

#### Features:

- ▶ Used to increase bore depth.
- ▶ Connects quickly and easily with the MVS connection.
- ▶ Aluminium components available to reduce stress on the spindle.



# WOHLHAUPTER® FINE BORING HEAD with NOVI<sup>TECH</sup>®

## Are you looking for more from your tooling?

After facing problems with chatter and chipping inserts, our customer, who machines fueling machine head rotors from ASTM A276 - 304L in the nuclear power industry, sought a better solution to their machining process.

The customer turned to Allied for help finding a new solution. Once the causes of insert failure and chatter were identified, our experienced team was able to create the best assembly suitable for the application. Using **Wohlhaupter's analogue balanced fine boring head** paired with the **NOVI<sup>TECH</sup> vibration dampening module**, they were able to eliminate the issues our customers were facing.

With the previous tooling, the customer achieved only 12 minutes of tool life, but with Allied's Wohlhaupter assembly, they achieved more than four times the life for 65 minutes!

Allied's Wohlhaupter assembly improved the machining process by making it more consistent and saved the customer money by reducing the cost per hole. If you are looking to save time and money, **give us a call, and we will help you find the right solution.**



		Measure	Competitor Boring Head	Wohlhaupter Fine Boring Head with NOVI <sup>TECH</sup>
<b>Product:</b>	Wohlhaupter analogue balanced fine boring head with NOVI <sup>TECH</sup>	RPM	106	372
<b>Objectives:</b>	(1) Decrease cycle time (2) Improve process	Speed Rate	40 M/min	140 M/min
<b>Industry:</b>	Renewable energy/energy	Feed Rate	0.076 mm/rev	0.16 mm/rev
<b>Part:</b>	Nuclear fueling machine head rotor	Penetration Rate	9 mm/min	60 mm/min
<b>Material:</b>	ASTM A276-304L	Cycle Time	2 hr 10 min	17 min
<b>Hole Ø:</b>	120 mm	Tool Life	12 min	65 min
<b>Hole Depth:</b>	1040 mm	Wohlhaupter offered <b>93.32%</b> cost per hole savings over the competitor tooling.		

▶ Analogue balanced fine boring head  
**Item No. 464038\***  
*\*replacement for 364047*

▶ Boring insert  
**Item No. 297994WHC111**

▶ NOVI<sup>TECH</sup> vibration dampening intermediate module  
**Item No. 519004**



*86.92%  
cycle time reduction*

The Wohlhaupter boring head with the NOVI<sup>TECH</sup> vibration dampening module provided:

- ✓ Increased penetration rate
- ✓ Decreased cycle time
- ✓ Increased tool life
- ✓ Decreased cost per hole



# THE DEEP HOLE 10xD BORING SOLUTION YOU'VE BEEN LOOKING FOR



## OUR SOLUTION


- ▶ Machine up to **10xD**.
- ▶ Connect quickly and easily with the **MVS connection**.
- ▶ Utilise existing **Wohlhaupter® components**.
- ▶ **Increase** your productivity, surface quality, and process reliability.
- ▶ **Increase** your tool and spindle life.

## YOUR ADVANTAGE

Dampening module with viscoelastic bearing

Absorber mass

## THE SURFACE QUALITY TELLS IT ALL

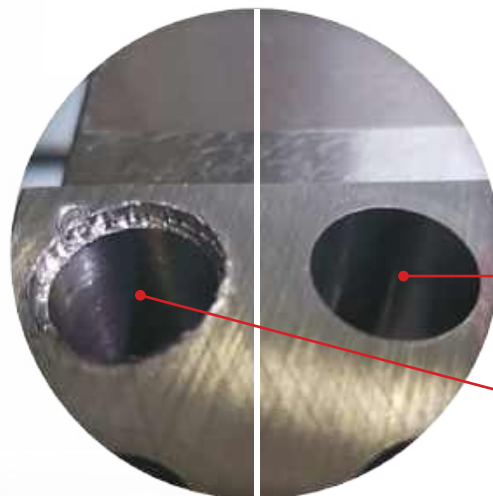

When our customer was machining alloy steel to 9xD, the NOVITECH provided reliable machining, which achieved high surface quality (Ra = 1 µm).



Wohlhaupter NOVITECH with VarioBore precision boring head

Standard tool construction with steel extension




## NOVI<sup>TECH</sup>® Vibration Damping Intermediate Modules

Machining Diameter: 50.00 mm - 205.00 mm

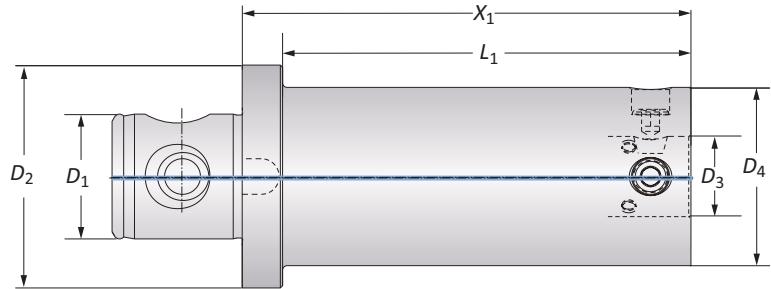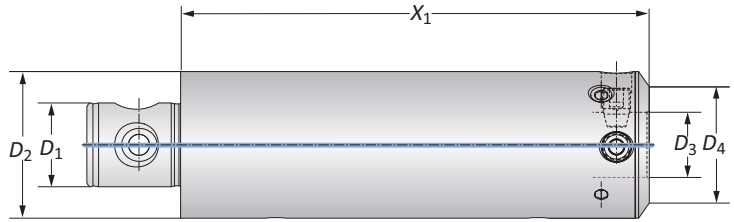

	MVS Connection		NOVI <sup>TECH</sup>		Weight	Part No.
	D <sub>2</sub>   D <sub>1</sub>	D <sub>4</sub>   D <sub>3</sub>	X <sub>1</sub>	L <sub>1</sub>		
Ⓜ	50 - 28*	40 - 22	200.00	-	2.80 (kg)	519002
	63 - 36	50 - 28	200.00	-	5.70 (kg)	519003
	80 - 36	63 - 36	200.00	-	7.50 (kg)	519004
	80 - 36	80 - 36	200.00	-	7.50 (kg)	519005
	100 - 56	80 - 36	200.00	182.00	9.90 (kg)	519006

\*D<sub>2</sub> = 49.50 mm

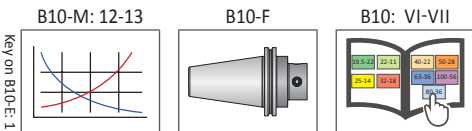

Ⓜ = Metric (mm)


**IMPORTANT:** Max spindle speed refers to maximum possible speed for an individual boring head and is not a recommended parameter. Refer to page B10-M: 12 for recommended application-specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)

**⚠ WARNING Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:**  
 -Consult machine tool builder for machine's weight limitations.  
 -Refer to example on page B10-M: 11 for calculating tool assembly weight.  
 Factory technical assistance is also available for specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)

**⚠ WARNING Tool failure can cause serious injury. To prevent:**  
 -Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank).  
 -When using Alu-Line® components, do not exceed recommended 5xD length-to-diameter ratio.  
 -When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio.  
 -When using heavy metal components, do not exceed recommended 8xD length-to-diameter ratio.  
 -When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio.  
 -When using a NOVI<sup>TECH</sup> module, do not exceed recommended 10xD length-to-diameter ratio.  
 -Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio.  
 Factory technical assistance is available for your specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)


## 248 Adapters

Adapters | Balanced Adapters

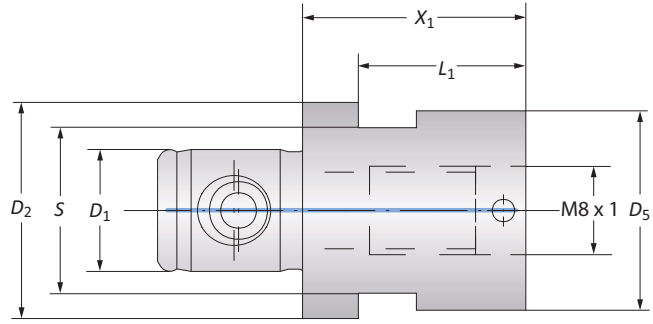

### Adapters


MVS Connection	Boring Connection	Adapter				Weight	Service Key	Part No.
		$D_2$   $D_1$	$X_1$	$L_1$	$S$			
$19.5 - 11$	M8 x 1	20.00	15.00	15/P	18.00	0.05 (kg)	15 S / P	219168
$23 - 11$	M8 x 1	20.00	-	19/P	23.00	0.07 (kg)	19 S / P	219169

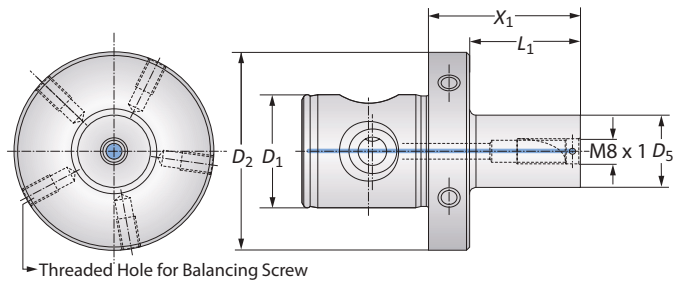

### Balanced Adapters

MVS Connection	Boring Connection	Adapter				Weight	Balancing Screw	Part No.
		$D_2$   $D_1$	$X_1$	$L_1$	$D_5$			
$50 - 28$	M8 x 1	32.00	19.00	15.00	0.35 (kg)	M6 x 1 x 10	219185	
$50 - 28$	M8 x 1	48.00	35.00	18.00	0.40 (kg)	M6 x 1 x 10	219176	
$50 - 28$	M8 x 1	48.00	35.00	23.00	0.45 (kg)	M6 x 1 x 10	219177	

**NOTE:** Balance refers to a specific residual imbalance of  $\leq 10$  g mm/kg.

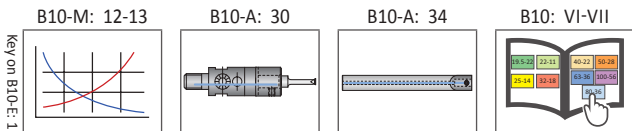

$\text{m}$  = Metric (mm)


**IMPORTANT:** Max spindle speed refers to maximum possible speed for an individual boring head and is not a recommended parameter. Refer to page B10-M: 12 for recommended application-specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)


**WARNING** Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:  
 -Consult machine tool builder for machine's weight limitations.  
 -Refer to example on page B10-M: 11 for calculating tool assembly weight.  
 Factory technical assistance is also available for specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)


**WARNING** Tool failure can cause serious injury. To prevent:  
 -Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank).  
 -When using Alu-Line® components, do not exceed recommended 5xD length-to-diameter ratio.  
 -When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio.  
 -When using heavy metal components, do not exceed recommended 8xD length-to-diameter ratio.  
 -When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio.  
 -When using a NOVITECH® module, do not exceed recommended 10xD length-to-diameter ratio.  
 -Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio.  
 Factory technical assistance is available for your specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)

## 248 Adapters

### Vibration Reducing Heavy Metal Adapters

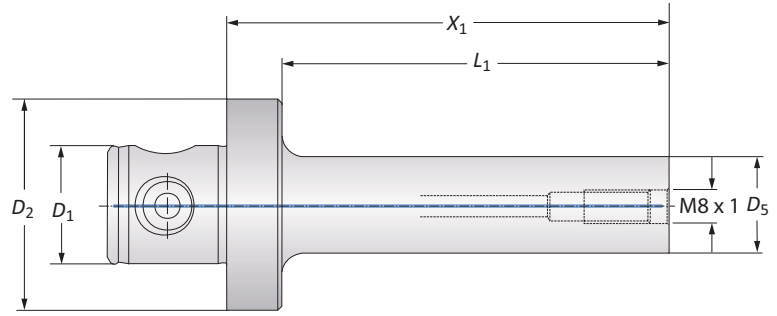

MVS Connection	Adapter						
	$D_2   D_1$	Boring Connection	$X_1$	$L_1$	$D_5$	Weight	Part No.
	50 - 28	M8 x 1	68.00	55.00	15.00	0.80 (kg)	248147
	50 - 28	M8 x 1	84.00	71.00	19.00	1.00 (kg)	248148
	50 - 28	M8 x 1	104.00	91.00	23.00	1.30 (kg)	248149

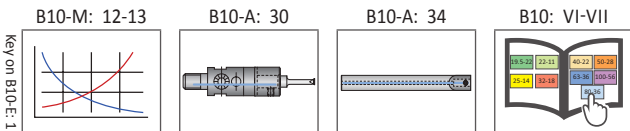

 = Metric (mm)



**IMPORTANT:** Max spindle speed refers to maximum possible speed for an individual boring head and is not a recommended parameter. Refer to page B10-M: 12 for recommended application-specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)

**⚠ WARNING Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:**  
 -Consult machine tool builder for machine's weight limitations.  
 -Refer to example on page B10-M: 11 for calculating tool assembly weight.  
 Factory technical assistance is also available for specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)

**⚠ WARNING Tool failure can cause serious injury. To prevent:**  
 -Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank).  
 -When using Alu-Line® components, do not exceed recommended 5xD length-to-diameter ratio.  
 -When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio.  
 -When using heavy metal components, do not exceed recommended 8xD length-to-diameter ratio.  
 -When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio.  
 -When using a NOVITECH® module, do not exceed recommended 10xD length-to-diameter ratio.  
 -Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio.  
 Factory technical assistance is available for your specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)

**Reducers**

Balanced

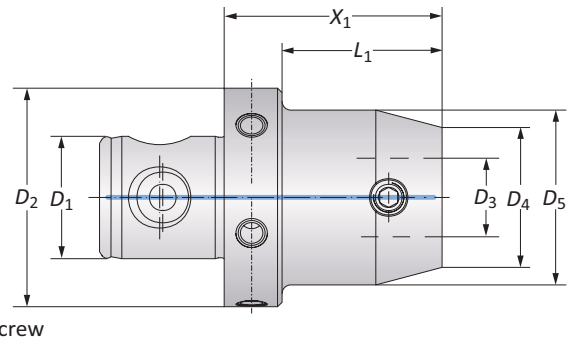

MVS Connection		Reducer			Weight	Balancing Screw	Part No.
D <sub>2</sub>   D <sub>1</sub>	D <sub>4</sub>   D <sub>3</sub>	X <sub>1</sub>	L <sub>1</sub>	D <sub>5</sub>			
25 - 14	19.5 - 11	30.00	21.00	-	0.10 (kg)	-	219034
25 - 14	22 - 11	30.00	21.00	-	0.20 (kg)	-	219035
32 - 18	22 - 11	12.00	0.50	-	0.10 (kg)	-	219036
32 - 18	25 - 14	30.00	21.00	-	0.10 (kg)	-	219037
40 - 22	22 - 11	12.00	0.50	-	0.20 (kg)	-	219038
40 - 22	25 - 14	30.00	21.00	-	0.20 (kg)	-	219039
40 - 22	32 - 18	30.00	-	40.00	0.50 (kg)	-	219040
50 - 28	19.5 - 11	54.00	41.00	-	0.40 (kg)	M6 x 1 x 10	219051
50 - 28	22 - 11	14.00	0.50	-	0.30 (kg)	M6 x 1 x 10	219041
50 - 28	22 - 11	54.00	41.00	-	0.40 (kg)	M6 x 1 x 10	219052
50 - 28	25 - 14	14.00	0.50	-	0.30 (kg)	M6 x 1 x 7	119094
50 - 28	25 - 14	59.00	46.00	-	0.40 (kg)	M6 x 1 x 10	119054
50 - 28	25 - 14	59.00	46.00	32.00	0.50 (kg)	M6 x 1 x 10	119055
50 - 28	25 - 14	119.00	106.00	32.00	0.90 (kg)	M6 x 1 x 10	119010
50 - 28	25 - 14	119.00	106.00	36.00	1.00 (kg)	M6 x 1 x 10	219030*
50 - 28	32 - 18	49.00	36.00	35.00	0.90 (kg)	M6 x 1 x 10	219085
50 - 28	32 - 18	109.00	96.00	35.00	1.00 (kg)	M6 x 1 x 10	219086
50 - 28	32 - 18	109.00	96.00	40.00	1.10 (kg)	M6 x 1 x 10	119012
50 - 28	32 - 18	109.00	96.00	46.00	1.30 (kg)	M6 x 1 x 10	219032*
50 - 28	40 - 22	40.00	27.00	-	0.50 (kg)	M6 x 1 x 10	219087
50 - 28	40 - 22	100.00	87.00	47.00	1.30 (kg)	M6 x 1 x 10	219088
50 - 28	63 - 36	50.00	-	-	1.00 (kg)	M6 x 1 x 10	119059

\*Reinforced reducer.

**NOTE:** Balance refers to a specific residual imbalance of ≤ 10 g mm/kg.

B10-M: 12-13

B10-F

B10: VI-VII

Key on B10-E: 1

Ⓜ = Metric (mm)



**IMPORTANT:** Max spindle speed refers to maximum possible speed for an individual boring head and is not a recommended parameter. Refer to page B10-M: 12 for recommended application-specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)

**⚠ WARNING** Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:  
 -Consult machine tool builder for machine's weight limitations.  
 -Refer to example on page B10-M: 11 for calculating tool assembly weight.  
 Factory technical assistance is also available for specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)

**⚠ WARNING** Tool failure can cause serious injury. To prevent:  
 -Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank).  
 -When using Alu-Line® components, do not exceed recommended 5xD length-to-diameter ratio.  
 -When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio.  
 -When using heavy metal components, do not exceed recommended 8xD length-to-diameter ratio.  
 -When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio.  
 -When using a NOVITECH® module, do not exceed recommended 10xD length-to-diameter ratio.  
 -Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio.  
 Factory technical assistance is available for your specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)

## Reducers

Balanced

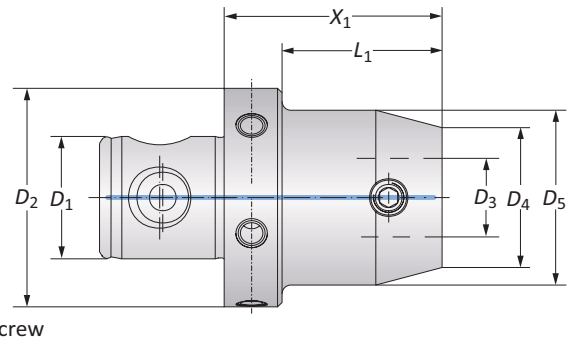


MVS Connection		Reducer			Weight	Balancing Screw	Part No.
D <sub>2</sub>   D <sub>1</sub>	D <sub>4</sub>   D <sub>3</sub>	X <sub>1</sub>	L <sub>1</sub>	D <sub>5</sub>			
63 - 36	19.5 - 11	54.00	41.00	-	0.60 (kg)	M6 x 1 x 10	219053
63 - 36	22 - 11	14.00	0.50	-	0.60 (kg)	M6 x 1 x 10	219042
63 - 36	22 - 11	54.00	41.00	-	0.70 (kg)	M6 x 1 x 10	219054
63 - 36	25 - 14	14.00	0.50	-	0.60 (kg)	M6 x 1 x 10	119095
63 - 36	25 - 14	59.00	46.00	-	0.70 (kg)	M6 x 1 x 10	119060
63 - 36	25 - 14	59.00	46.00	32.00	0.80 (kg)	M6 x 1 x 10	119061
63 - 36	25 - 14	119.00	106.00	32.00	1.10 (kg)	M6 x 1 x 15	119019
63 - 36	25 - 14	119.00	106.00	36.00	1.30 (kg)	M6 x 1 x 10	219031*
63 - 36	32 - 18	49.00	36.00	35.00	0.70 (kg)	M6 x 1 x 10	219089
63 - 36	32 - 18	109.00	96.00	35.00	1.20 (kg)	M6 x 1 x 10	219090
63 - 36	32 - 18	109.00	96.00	40.00	1.40 (kg)	M6 x 1 x 10	119021
63 - 36	32 - 18	109.00	96.00	46.00	1.60 (kg)	M6 x 1 x 10	219033*
63 - 36	40 - 22	40.00	27.00	-	0.80 (kg)	M6 x 1 x 10	219091
63 - 36	40 - 22	100.00	87.00	47.00	1.60 (kg)	M6 x 1 x 15	219092
63 - 36	40 - 22	150.00	137.00	50.00	2.40 (kg)	M6 x 1 x 15	119067
63 - 36	50 - 28	40.00	-	63.00	1.00 (kg)	M6 x 1 x 10	119064
63 - 36	50 - 28	40.00	27.00	-	0.80 (kg)	M6 x 1 x 10	119096**
63 - 36	50 - 28	100.00	-	63.00	2.40 (kg)	M6 x 1 x 15	119025
63 - 36	50 - 28	100.00	87.00	-	1.70 (kg)	M6 x 1 x 10	119097**
80 - 36	63 - 36	50.00	-	80.00	1.60 (kg)	M6 x 1 x 15	119098
100 - 56	80 - 36	70.00	52.00	-	3.60 (kg)	M8 x 1.25 x 20	219066

\* Reinforced reducer.

\*\*For milling applications.

**NOTE:** Balance refers to a specific residual imbalance of ≤ 10 g mm/kg.



 = Metric (mm)


**IMPORTANT:** Max spindle speed refers to maximum possible speed for an individual boring head and is not a recommended parameter. Refer to page B10-M: 12 for recommended application-specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)

**! WARNING** Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:  
 -Consult machine tool builder for machine's weight limitations.  
 -Refer to example on page B10-M: 11 for calculating tool assembly weight.  
 Factory technical assistance is also available for specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)

**! WARNING** Tool failure can cause serious injury. To prevent:  
 -Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank).  
 -When using Alu-Line® components, do not exceed recommended 5xD length-to-diameter ratio.  
 -When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio.  
 -When using heavy metal components, do not exceed recommended 8xD length-to-diameter ratio.  
 -When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio.  
 -When using a NOVITECH® module, do not exceed recommended 10xD length-to-diameter ratio.  
 -Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio.  
 Factory technical assistance is available for your specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)


## Reducer

Balanced Alu-Line

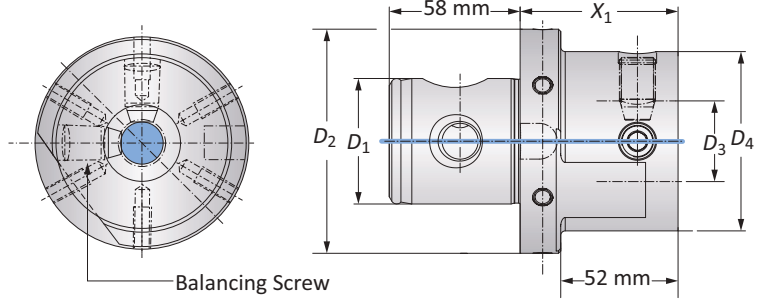

m	MVS Connection		Reducer		Weight	Balancing Screw	Part No.
	$D_2   D_1$	$D_4   D_3$	$X_1$	$L_1$			
	100 - 56	80 - 36	70.00	52.00	1.30 (kg)	M8 x 1.25 x 20	319013

**NOTE:** Balance refers to a specific residual imbalance of  $\leq 10$  g mm/kg.



m = Metric (mm)

**IMPORTANT:** Max spindle speed refers to maximum possible speed for an individual boring head and is not a recommended parameter. Refer to page B10-M: 12 for recommended application-specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)


**WARNING** Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:  
 -Consult machine tool builder for machine's weight limitations.  
 -Refer to example on page B10-M: 11 for calculating tool assembly weight.  
 Factory technical assistance is also available for specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)

**WARNING** Tool failure can cause serious injury. To prevent:  
 -Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank).  
 -When using Alu-Line® components, do not exceed recommended 5xD length-to-diameter ratio.  
 -When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio.  
 -When using heavy metal components, do not exceed recommended 8xD length-to-diameter ratio.  
 -When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio.  
 -When using a NOVITECH® module, do not exceed recommended 10xD length-to-diameter ratio.  
 -Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio.  
 Factory technical assistance is available for your specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)




## Heavy Metal Reducers

### Vibration Reduction

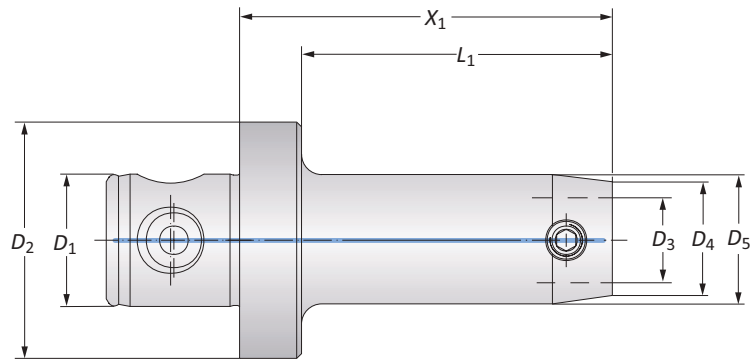

MVS Connection		Heavy Metal Reducer			Weight	Part No.
$D_2$   $D_1$	$D_4$   $D_3$	$X_1$	$L_1$	$D_5$		
50 - 28	19.5 - 11	90.00	77.00	–	1.00 (kg)	219055
50 - 28	22 - 11	110.00	97.00	23.00	1.30 (kg)	219056
50 - 28	25 - 14	124.00	111.00	28.00	1.70 (kg)	219057
50 - 28	25 - 14	144.00	131.00	32.00	2.30 (kg)	219058
50 - 28	25 - 14	164.00	151.00	35.00	2.90 (kg)	219059
50 - 28	32 - 18	154.00	141.00	37.00	2.90 (kg)	219093
50 - 28	32 - 18	154.00	141.00	42.00	3.70 (kg)	219060

**NOTE:** Heavy metal reducers are used to reduce vibration when machining deep boring applications. When using heavy metal reducers, the maximum cutting speed ( $V_c$ ) is 200 m/min. If steel extensions are also used, reduce the cutting speed by 50% and use replaceable inserts where  $r = 0.10$  mm.

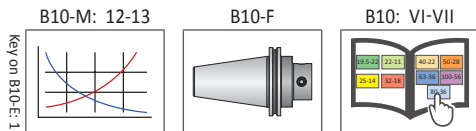

 = Metric (mm)

**IMPORTANT:** Max spindle speed refers to maximum possible speed for an individual boring head and is not a recommended parameter. Refer to page B10-M: 12 for recommended application-specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)


**WARNING** Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:  
 -Consult machine tool builder for machine's weight limitations.  
 -Refer to example on page B10-M: 11 for calculating tool assembly weight.  
 Factory technical assistance is also available for specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)

**WARNING** Tool failure can cause serious injury. To prevent:  
 -Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank).  
 -When using Alu-Line® components, do not exceed recommended 5xD length-to-diameter ratio.  
 -When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio.  
 -When using heavy metal components, do not exceed recommended 8xD length-to-diameter ratio.  
 -When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio.  
 -When using a NOVITECH® module, do not exceed recommended 10xD length-to-diameter ratio.  
 -Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio.  
 Factory technical assistance is available for your specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)

A  
B  
C  
D  
E  
F  
G  
H  
I  
J  
K  
L  
M  
INDEX

Extensions

Balanced

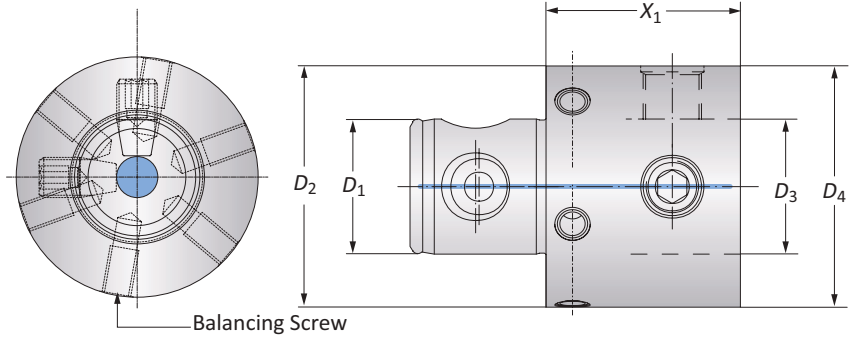

	MVS Connection		Extension	Weight	Balancing Screw	Part No.
	D <sub>2</sub>   D <sub>1</sub>	D <sub>4</sub>   D <sub>3</sub>				
	19.5 - 11	19.5 - 11	40.00	0.10 (kg)	-	219043
	22 - 11	22 - 11	40.00	0.10 (kg)	-	219044
	25 - 14	25 - 14	25.00	0.10 (kg)	-	219068
	25 - 14	25 - 14	40.00	0.10 (kg)	-	119001
	32 - 18	32 - 18	40.00	0.20 (kg)	-	119002
	40 - 22	40 - 22	40.00	0.40 (kg)	-	119003
	50 - 28	50 - 28	40.00	0.60 (kg)	M6 x 1 x 10	119004
	50 - 28*	50 - 28*	75.00	1.10 (kg)	M6 x 1 x 10	219097
	50 - 28	50 - 28	75.00	1.10 (kg)	M6 x 1 x 10	219082
	50 - 28	50 - 28	100.00	1.50 (kg)	M6 x 1 x 10	119058
Ⓜ	63 - 36	63 - 36	50.00	1.10 (kg)	M6 x 1 x 10	119005
	63 - 36	63 - 36	75.00	1.70 (kg)	M6 x 1 x 15	219083
	63 - 36	63 - 36	125.00	2.90 (kg)	M6 x 1 x 15	119065
	80 - 36	80 - 36	50.00	1.90 (kg)	M6 x 1 x 15	119006
	80 - 36	80 - 36	75.00	2.80 (kg)	M6 x 1 x 15	219084
	80 - 36	80 - 36	125.00	4.80 (kg)	M6 x 1 x 15	119066
	80 - 36	80 - 36	200.00	7.40 (kg)	M8 x 1.25 x 21	219094
	80 - 36	80 - 36	275.00	10.10 (kg)	M8 x 1.25 x 21	119069
	100 - 56	100 - 56	75.00	4.30 (kg)	M8 x 1.25 x 20	219095
	100 - 56	100 - 56	100.00	5.60 (kg)	M8 x 1.25 x 20	219061
	100 - 56	100 - 56	150.00	8.10 (kg)	M8 x 1.25 x 20	219096
	100 - 56	100 - 56	200.00	10.20 (kg)	M8 x 1.25 x 20	219062
	100 - 56	100 - 56	300.00	14.60 (kg)	M8 x 1.25 x 20	219063

\*D<sub>2</sub> / D<sub>4</sub> = 49.50 mm for boring 50.00 mm diameter applications.  
**NOTE:** Balance refers to a specific residual imbalance of ≤ 10 g mm/kg.

B10-M: 12-13

B10-F

B10: VI-VII

Key on B10-E: 1

Ⓜ = Metric (mm)


**IMPORTANT:** Max spindle speed refers to maximum possible speed for an individual boring head and is not a recommended parameter. Refer to page B10-M: 12 for recommended application-specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)

**⚠ WARNING** Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:  
 -Consult machine tool builder for machine's weight limitations.  
 -Refer to example on page B10-M: 11 for calculating tool assembly weight.  
 Factory technical assistance is also available for specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)

**⚠ WARNING** Tool failure can cause serious injury. To prevent:  
 -Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank).  
 -When using Alu-Line® components, do not exceed recommended 5xD length-to-diameter ratio.  
 -When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio.  
 -When using heavy metal components, do not exceed recommended 8xD length-to-diameter ratio.  
 -When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio.  
 -When using a NOVITECH® module, do not exceed recommended 10xD length-to-diameter ratio.  
 -Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio.  
 Factory technical assistance is available for your specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)


## Extensions

### Balanced Alu-Line

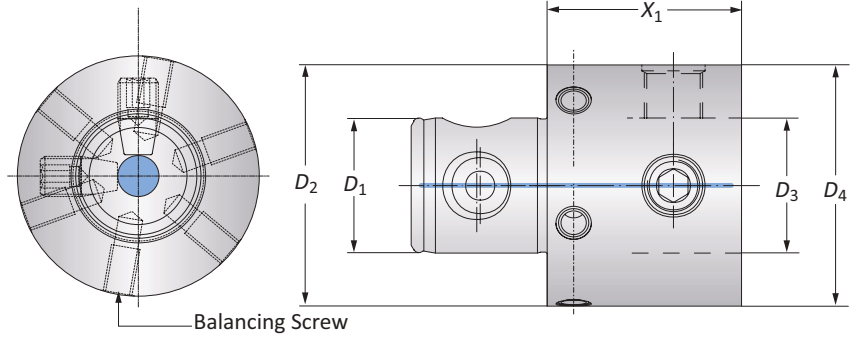

MVS Connection		Modules				
$D_2$   $D_1$	$D_4$   $D_3$	$X_1$	Weight	Balancing Screw	Part No.	
50 - 28	50 - 28	40.00	0.20 (kg)	M6 x 1 x 8	319021	
50 - 28	50 - 28	75.00	0.40 (kg)	M6 x 1 x 10	319022	
50 - 28	50 - 28	100.00	0.60 (kg)	M6 x 1 x 10	319023	
63 - 36	63 - 36	50.00	0.40 (kg)	M6 x 1 x 8	319002	
63 - 36	63 - 36	125.00	1.10 (kg)	M6 x 1 x 10	319003	
80 - 36	80 - 36	50.00	0.70 (kg)	M6 x 1 x 10	319004	
80 - 36	80 - 36	75.00	1.00 (kg)	M6 x 1 x 10	319016	
80 - 36	80 - 36	125.00	1.80 (kg)	M6 x 1 x 10	319005	
80 - 36	80 - 36	200.00	2.70 (kg)	M6 x 1 x 10	319017	
80 - 36	80 - 36	275.00	3.70 (kg)	M6 x 1 x 10	319006	
100 - 56	100 - 56	75.00	1.50 (kg)	M8 x 1.25 x 20	319019	
100 - 56	100 - 56	100.00	2.20 (kg)	M8 x 1.25 x 20	319007	
100 - 56	100 - 56	150.00	3.00 (kg)	M8 x 1.25 x 20	319018	
100 - 56	100 - 56	200.00	3.80 (kg)	M8 x 1.25 x 20	319008	
100 - 56	100 - 56	300.00	5.40 (kg)	M8 x 1.25 x 20	319009	

**NOTE:** Balance refers to a specific residual imbalance of  $\leq 10$  g mm/kg.



$\text{mm}$  = Metric (mm)

**IMPORTANT:** Max spindle speed refers to maximum possible speed for an individual boring head and is not a recommended parameter. Refer to page B10-M: 12 for recommended application-specific parameters. Factory technical assistance is available for your specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)

**WARNING** Exceeding weight capacity for machine tool spindle and tool changer can cause machine damage and/or serious injury. To prevent:  
 -Consult machine tool builder for machine's weight limitations.  
 -Refer to example on page B10-M: 11 for calculating tool assembly weight.  
 Factory technical assistance is also available for specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)

**WARNING** Tool failure can cause serious injury. To prevent:  
 -Do not exceed recommended 10xD length-to-diameter ratio or exceed 4 total components (including shank).  
 -When using Alu-Line® components, do not exceed recommended 5xD length-to-diameter ratio.  
 -When using tool steel components, do not exceed recommended 6xD length-to-diameter ratio.  
 -When using heavy metal components, do not exceed recommended 8xD length-to-diameter ratio.  
 -When using a carbide shank, do not exceed recommended 9xD length-to-diameter ratio.  
 -When using a NOVITECH® module, do not exceed recommended 10xD length-to-diameter ratio.  
 -Refer to examples on pages B10-M: 8-10 for calculating length-to-diameter ratio.  
 Factory technical assistance is available for your specific applications through our Application Engineering department. [email: engineering.eu@alliedmachine.com](mailto:engineering.eu@alliedmachine.com)

A  
B  
C  
D  
E  
F  
G  
H  
I  
J  
K  
L  
M  
INDEX

# Guaranteed Test / Demo Application Form

Distributor PO #	
------------------	--

The following must be filled out completely before your test will be considered

**IMPORTANT:** For processing, send purchase order to your Allied Field Sales Engineer (FSE). Please clearly mark the paperwork as "Test Order."

### Distributor Information

Company Name: \_\_\_\_\_  
 Contact: \_\_\_\_\_  
 Account Number: \_\_\_\_\_  
 Phone: \_\_\_\_\_  
 Email: \_\_\_\_\_

### End User Information

Company Name: \_\_\_\_\_  
 Contact: \_\_\_\_\_  
 Industry: \_\_\_\_\_  
 Phone: \_\_\_\_\_  
 Email: \_\_\_\_\_

**Current Process** List all tooling, coatings, substrates, speeds and feeds, tool life, and any problems you are experiencing

\_\_\_\_\_  
 \_\_\_\_\_

**Test Objective** List what would make this a successful test (i.e. penetration rate, finish, tool life, hole size, etc.)

\_\_\_\_\_  
 \_\_\_\_\_

### Application Information

Hole Diameter: _____ in/mm	Tolerance: _____	Material: _____ (4150, A36, cast iron, etc.)
Pre-existing Diameter: _____ in/mm	Depth of Cut: _____ in/mm	Hardness: _____ (BHN, Rc)
Required Finish: _____ RMS		State: _____ (Casting, hot rolled, forging)

### Machine Information

Machine Type: _____ (Lathe, screw machine, machine center, etc.)	Builder: _____ (Haas, Mori Seiki, etc.)	Model #: _____
Shank Required: _____ (CAT50, Morse taper, etc.)		Power: _____ HP/KW
Rigidity: _____	Orientation: _____	Tool Rotating: _____
<input type="checkbox"/> Excellent	<input type="checkbox"/> Vertical	<input type="checkbox"/> Yes
<input type="checkbox"/> Good	<input type="checkbox"/> Horizontal	<input type="checkbox"/> No
<input type="checkbox"/> Poor		Thrust: _____ lbs/N

### Coolant Information

Coolant Delivery: _____ (Through tool, flood)	Coolant Pressure: _____ PSI / bar
Coolant Type: _____ (Air mist, oil, synthetic, water soluble, etc.)	Coolant Volume: _____ GPM / LPM

### Requested Tooling

QTY	Item Number

QTY	Item Number

**engineering.eu@alliedmachine.com**

Allied Machine & Engineering Co. (Europe) Ltd  
 93 Vantage Point, Pensnett Estate,  
 Kingswinford, DY6 7FR, United Kingdom

**+44 (0)1384 400 900**  
**www.alliedmachine.com**



**ALLIED MACHINE & ENGINEERING**



**Wohlhaupter**  
 Holmaking Solutions for Today's Manufacturing



# ALLIED MACHINE & ENGINEERING

## Warranty Information



Allied Machine & Engineering (“Allied Machine”) warrants to original equipment manufacturers, distributors, industrial and commercial users of its products for one year from the original date of sale that each new product manufactured or supplied by Allied Machine shall be free from defects in material and workmanship.

Allied Machine’s sole and exclusive obligation under this warranty is limited to, at its option, without additional charge, replacing or repairing this product or issuing a credit. For this warranty to be applied, the product must be returned freight prepaid to the plant designated by an Allied Machine representative and which, upon inspection, is determined by Allied Machine to be defective in material and workmanship.

Complete information as to operating conditions, machine, setup, and the application of cutting fluid should accompany any product returned for inspection. This warranty shall not apply to any Allied Machine products which have been subjected to misuse, abuse, improper operating conditions, improper machine setup or improper application of cutting fluid or which have been repaired or altered if such repair or alteration, in the judgement of Allied Machine, would adversely affect the performance of the product.

**THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** Allied Machine shall have no liability or responsibility for any claim, whether in contract, tort or otherwise, for any loss or damage arising out of, connected with, or resulting from the manufacture, sale, delivery or use of any product sold hereunder, in excess of the cost of replacement or repair as provided herein.

Allied Machine shall not be liable in contract or in tort (including, without limitation, negligence, strict liability or otherwise) for economic losses of any kind or for any special, incidental, indirect, consequential, punitive or exemplary damages arising in any way out of the performance of, or failure to perform this agreement.

**ALL PRICES, DELIVERIES, DESIGNS, AND MATERIALS ARE SUBJECT TO CHANGE WITHOUT NOTICE.**



Allied Machine & Engineering Co. Europe Ltd. is registered to ISO 9001:2015 by bsi.



Allied Machine & Engineering is registered to ISO 9001:2015 by DQS



Wohlhaupter GmbH is registered to ISO 9001:2015 by GA TECHNIX

## Europe

### **Allied Machine & Engineering Co. (Europe) Ltd.**

93 Vantage Point  
Pensnett Estate  
Kingswinford  
West Midlands  
DY6 7FR England

**Phone:**

+44 (0) 1384.400900

### **Wohlhaupter® GmbH**

Maybachstrasse 4  
Postfach 1264  
72636 Frickenhausen  
Germany

**Phone:**

+49 (0) 7022.408.0

## United States

### **Allied Machine & Engineering**

120 Deeds Drive  
Dover OH 44622  
United States

**Phone:**

+1.330.343.4283

**Toll Free USA and Canada:**

800.321.5537

**Toll Free USA and Canada:**

800.223.5140

### **Allied Machine & Engineering**

485 W Third Street  
Dover OH 44622  
United States

**Phone:**

+1.330.343.4283

**Toll Free USA and Canada:**

800.321.5537

## Asia

### **Wohlhaupter® India Pvt. Ltd.**

B-23, 3rd Floor  
B Block Community Centre  
Janakpuri, New Delhi - 110058  
India

**Phone:**

+91 (0) 11.41827044

Your local Allied Machine representative:

[www.alliedmachine.com](http://www.alliedmachine.com)

Allied Machine & Engineering Co. (Europe) Ltd is registered to **ISO 9001:2015** by bsi.

Allied Machine & Engineering is registered to **ISO 9001:2015** by DQS

Wohlhaupter GmbH is registered to **ISO 9001:2015** by QTA TECHNIC

